




OV 22

FM Bereichs-Verstärker FM Amplifier Amplificateur FM

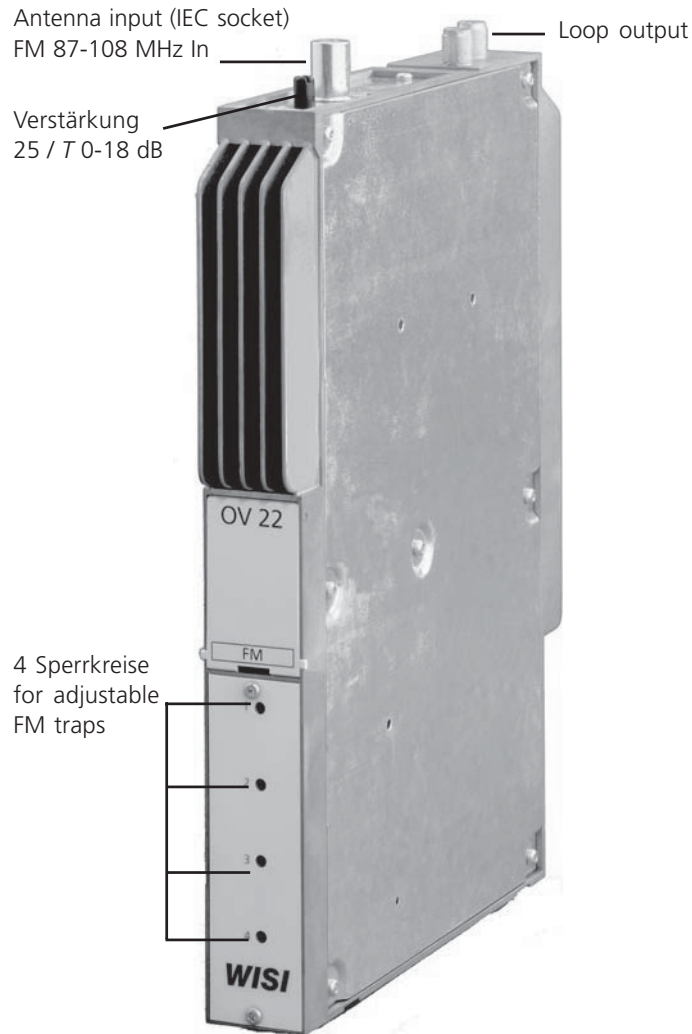

Frequenzbereich <i>Frequency range</i> <i>Bande de fréquence</i>	87-108 87-108	MHz MHz
4 Sperrkreise, einstellbar <i>4 adjustable frequency traps</i> <i>4 filtres réjecteurs, réglables</i>	Bandbreite Sperrtiefe <i>Bandwidth</i> <i>Trapping depth</i> <i>largeur de bande</i> <i>réjection</i>	5 20 MHz dB
Verstärkung einstellbar <i>Gain adjustable</i> <i>Amplification ajustable</i>	25 / T 0-18 dB	
Ausgangspegel <i>Output level</i> <i>Niveau de sortie</i>	87	dB μ V
HF-Eingang, 75 Ω <i>HF input connectors, 75 Ω</i> <i>Prise d'entrée HF, 75 Ω</i>	IEC-Buchse <i>IEC (female) connector</i> <i>Prise IEC</i>	
HF-Ausgang, 75 Ω <i>HF output connectors, 75 Ω</i> <i>Prise de sortie HF 75 Ω</i>	Durchschleifausgang <i>Loop-through output</i> <i>Sortie de passage</i>	F
Durchgangsdämpfung <i>Thru loss</i> <i>Atténuation de passage</i>	0,5	dB
Betriebsumgebungstemperatur <i>Operating ambient temperature</i> <i>Température ambiante</i>	-10...50	°C



OC/1-OT-595